



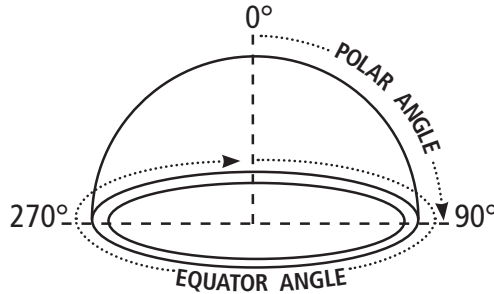


Drill Hole Instruction Sheet


When measuring for holes, orient hemispheres as shown.

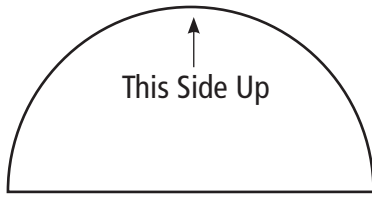

Measure along the Polar and Equator angles to determine the exact location of all holes to be drilled in each glass sphere. Record all necessary information in the grids below.

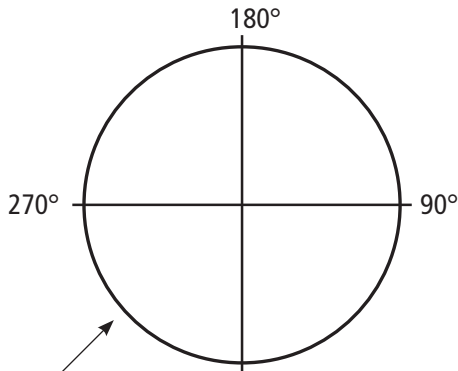

Top view of hemispheres

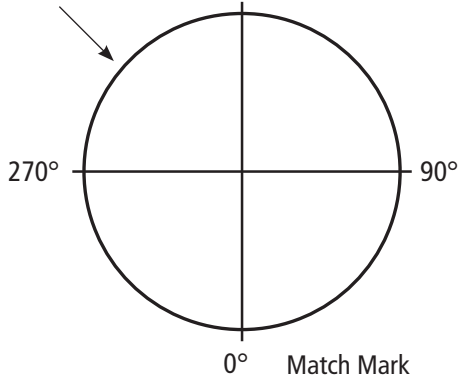

TOP HEMISPHERE								
Hole Number	A	B	C	D	E	F	G	H
Equator Angle								
Polar Angle								
Hole Type								

BOTTOM HEMISPHERE								
Hole Number	1	2	3	4	5	6	7	8
Equator Angle								
Polar Angle								
Hole Type								

Customer: _____ Date: _____

Revision: _____

Sales Order: _____ Ship Date: _____ Quantity: _____ Size: _____

Recommended Polar Angle for Penetrators for Hard Hat Clearance				
10" H	13" SRO	17" H	17" HR	17" SR
25	30	30	N.A.	25

Typical Vacuum Port Positions	
XT-6000-10	E=180 P=45, top hemi, per B-500-3
XT-6000-17	E=0 P=25, top hemi, per B-500-7
TR-6000	E=135 P=25, per B-210-428

Hole Type	Standard Applications	Drill Diameter
1	Vacuum Port, 3/16"	.203"
2	XT/TR Transducer	.281"
3	Bulkhead, 7/16", Brass	.453"
4	Bulkhead, 7/16", Titanium	.438"
5	Single Pin Penetrator	.156"

Special Applications		
6		
7		
8		

NOTE: — All customer supplied penetrators must have 1" stems and be furnished with dummy plugs and mounting hardware.
— When shipping penetrators to Teledyne Benthos, please reference purchase order number and/or sales order number.